

Protective Boot Installation Methods for Traveling Nut Jacks.

Please fill in the required information on one of the following examples and return it to Joyce/Dayton via fax at 937-297-7173, or email to sales@joycedayton.com

JOYCE/DAYTON CORP. 3300 OFFICE PARK DRIVE DAYTON, OH 45439 Phone 937-294-6261 Fax 937-294-7173


www.joycedayton.com



Figure 1.

Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

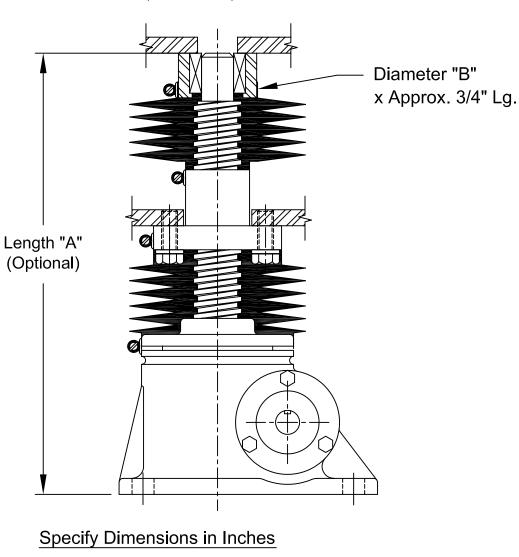


| Required Travel Length | |
|------------------------|------------|
| Length "A" | (Optional) |
| Diameter "B" | |
| Company Name | |
| P.O. Number | |



Figure 2.

Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

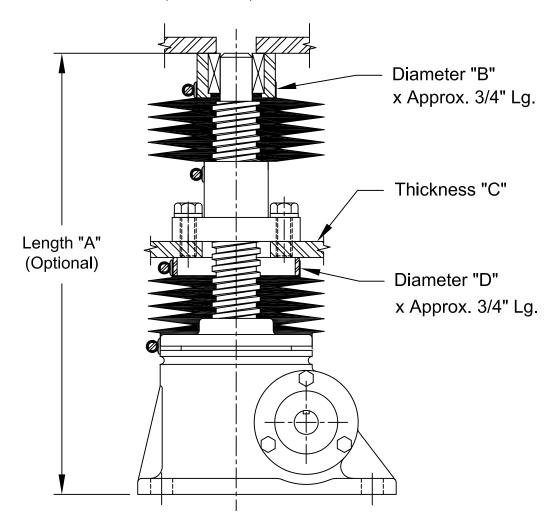


| Required Travel Length | | |
|------------------------|----------------|--|
| Length "A" | , Diameter "B" | |
| Thickness "C" | ,Diameter "D" | |
| Company Name | | |
| P.O. Number | | |



Figure 3.

Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

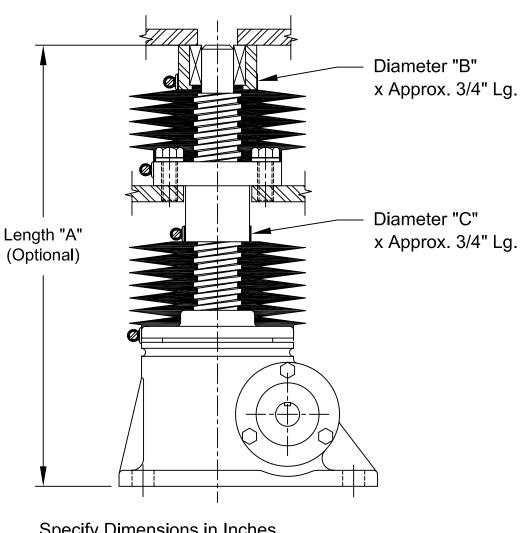


| Required Travel Length _ | | |
|--------------------------|----------------|--|
| Length "A" | _ (optional) | |
| Diameter "B" | , Diameter "C" | |
| Company Name | | |
| P.O. Number | | |



Figure 4.

Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

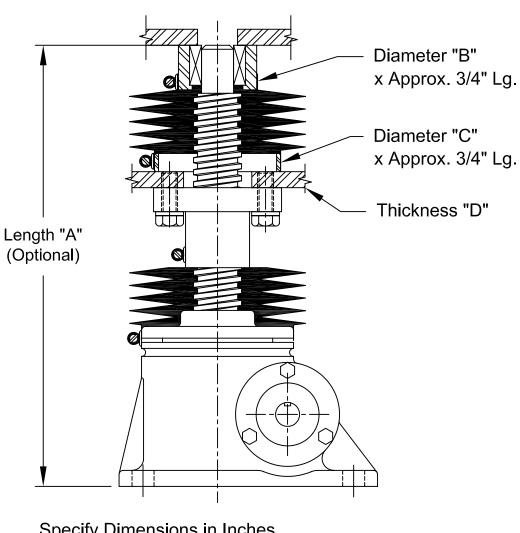


| Required Travel Length ₋ | | |
|-------------------------------------|-----------------|---|
| Length "A" | , Diameter "B" | |
| Diameter "C" | , Thickness "D" | |
| Company Name | | _ |
| P.O. Number | | |



Figure 5.

Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

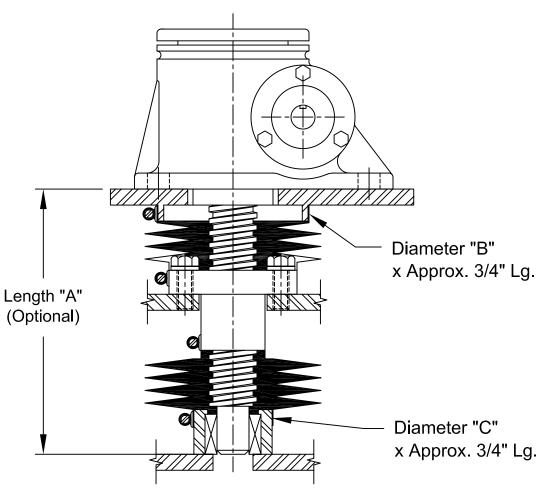


| Required Travel Length _ | | |
|--------------------------|----------------|--|
| Length "A" | _ (optional) | |
| Diameter "B" | , Diameter "C" | |
| Company Name | | |
| P O Number | | |



Figure 6.

Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

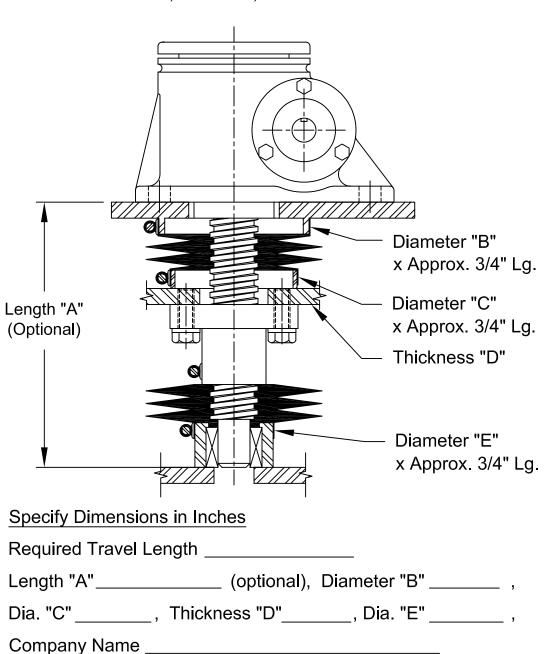


P.O. Number _____



Figure 7.

Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

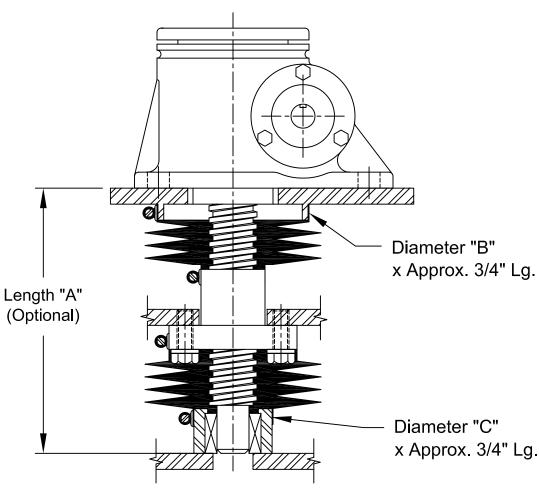

| Required Travel Length | |
|------------------------|----------------|
| Length "A" | (optional) |
| Diameter "B" | , Diameter "C" |
| Company Name | |
| P.O. Number | |



Figure 8.

Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

