


MACHINE SCREW ComDRIVES®


25 TON - 3 3/8" SCREW

CD 1125 / DCD 1125
CD 3225 / DCD 3225

Upright

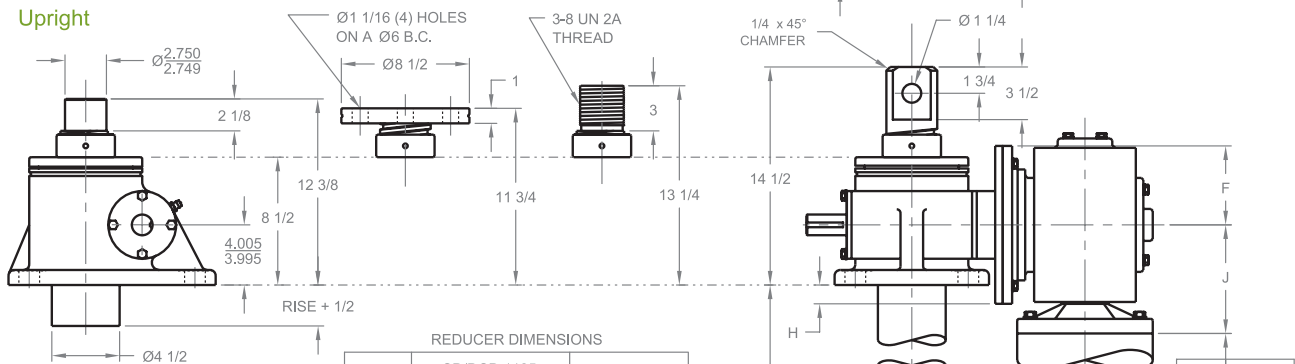


Upright traveling nut

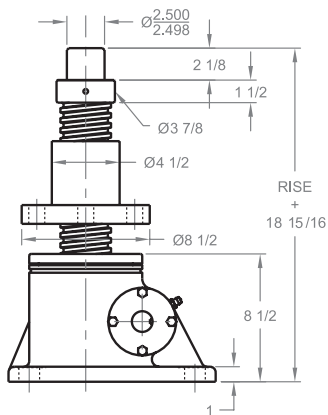

MODEL	CD/DCD 1125 CD/DCD 3225						CD/DCD 1125		
	5:1	10:1	5:1	10:1	5:1	10:1	5:1	10:1	5:1
RATIO	5:1	10:1	5:1	10:1	5:1	10:1	5:1	10:1	5:1
HP	3	5	5	7 1/2	7 1/2	10	15		
A	9 17/32	9 31/32	11 19/32						
B	13 1/32	13 29/32	16 3/32						
C	2 5/8	3 1/4	4 1/4						
D	4 7/16	5 1/2	6 1/2						
E	11 9/16	12 3/4	15 1/4						
F	3 9/16	4 1/2	5 1/4						
G	5 1/2	5 1/2	5 1/2						
H	0	1/2	1 1/4						
J	4 11/16	6 3/4	7 1/4						
K	3 11/32	4 5/16	6 1/8						

RISE + 2 5/8
DOUBLE CLEVIS
SHOWN 90° FROM
TRUE POSITION




HP	DIM.
3	17 3/8
5	18 3/4
7 1/2	15 13/16
10	16 5/8
15	16 5/8

BRAKE
(OPTIONAL)


HP	DIM.
3	Ø9 1/16
5	
7 1/2	Ø10 7/8
10	
15	Ø12 3/8

HP	DIM.
3	7 9/16
5	
7 1/2	8 1/4
10	8 7/8
15	9 1/16

Inverted traveling nut

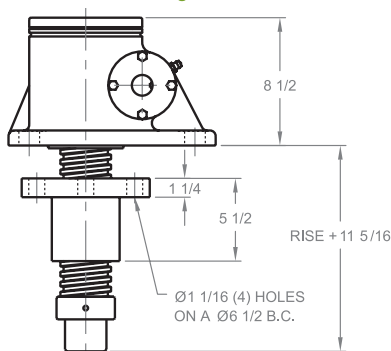


Typical Plan View

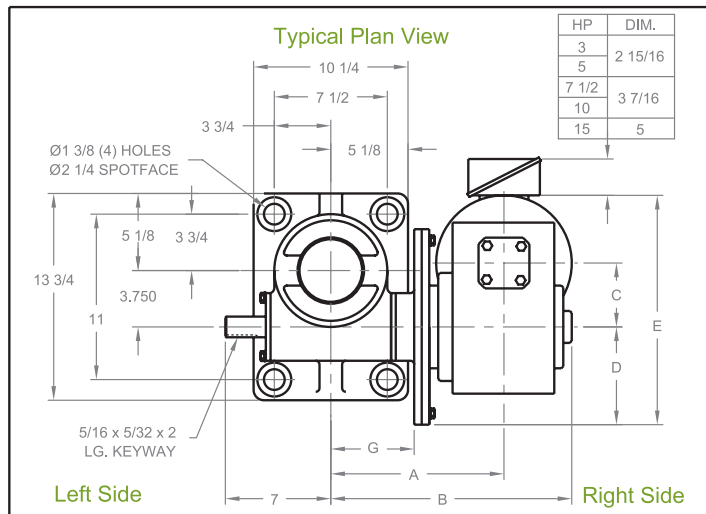

Left Side

Right Side

Inverted

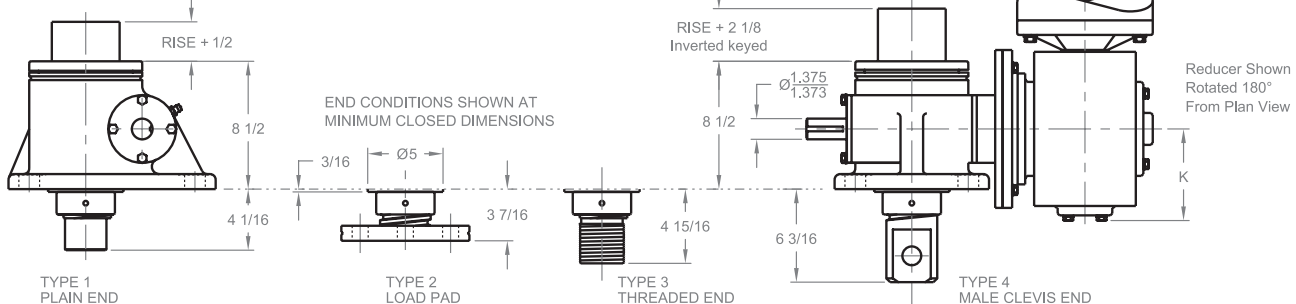

TYPE 1
PLAIN END

TYPE 2
LOAD PAD

TYPE 3
THREADED END

TYPE 4
MALE CLEVIS END

NOTE: FOR LIFTING CAPACITIES SEE PAGE 49

Note: Drawings are artist's conception — not for certification; dimensions are subject to change without notice.